


## **STRIPPER P 50**

**Pneumatic dismantling technology**

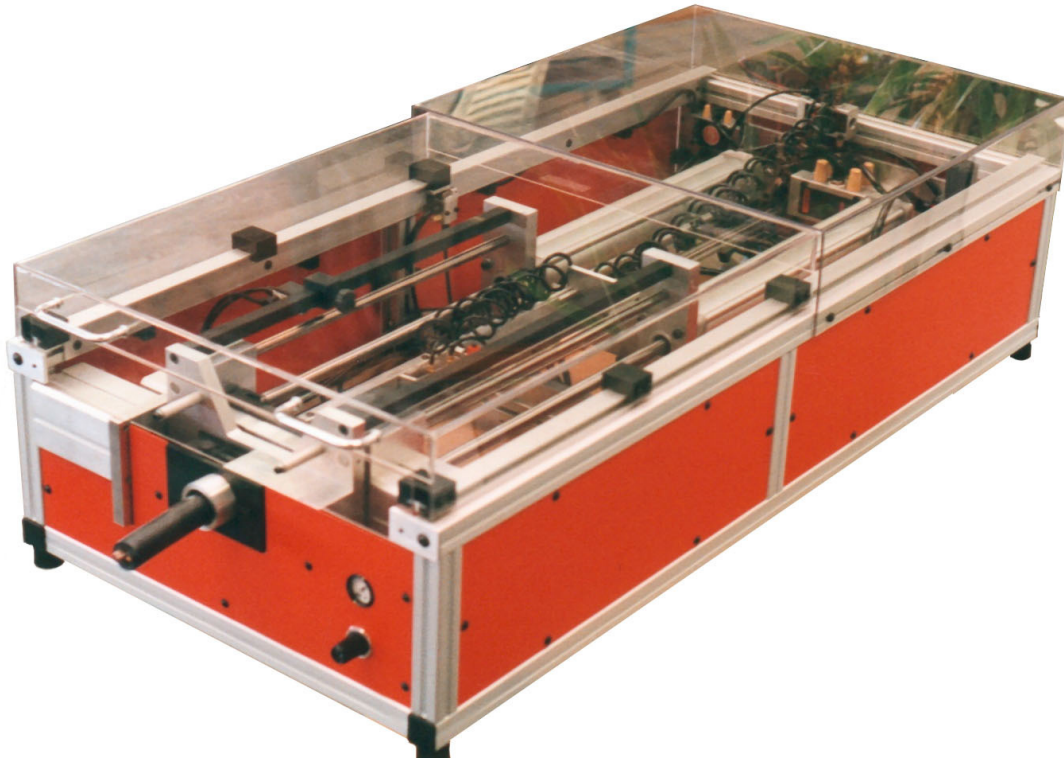

### **The Stripper P 50**

are used in the cable pre-assembling industry ,when cables, ready for further processes are requested. The machines work semi-automatic and are suitable for mass production whenever the outer jacket of the cable has to be removed.

The machine is very compact and easy to use.

### **Function:**

The cable beginning is placed into the stripper till the set end stop is reached. Then the foot interruptor is activated. In one step, with help of an installed pneumatic system, the outer jacket is cut and stripped of. The stripped cable can be pulled out. The stripped off jacket falls through a shaft under the machine into a collection tank.

It is very easy to change the stripper blade and cable guide tubes for the suitable stripping length without any tools.

**Stripping blades, guide tubes and press blocks are not included in the basic equipment!**

### Insulation removable length:

|                      |      |         |                        |
|----------------------|------|---------|------------------------|
| STRIPPER P 50 / 100  | max. | 100 mm  | (various 0...100 mm )  |
| STRIPPER P 50 / 500  | max: | 500 mm  | (various 0...500 mm )  |
| STRIPPER P 50 / 1000 | max: | 1000 mm | (various 0...1000 mm ) |
| STRIPPER P 50 / 1500 | max: | 1500 mm | (various 0...1500 mm ) |
| STRIPPER P 50/ 2000  | max: | 2000 mm | (various 0...2000 mm)  |

### Technical data

|                                 |                            |         |                                      |
|---------------------------------|----------------------------|---------|--------------------------------------|
| <b>Basic equipment:</b>         | <b>STRIPPER P 50 , XXX</b> |         |                                      |
| <b>Part-number:</b>             | <b>Look at price-list</b>  |         |                                      |
| <b>Delivery time:</b>           | <b>5 weeks</b>             |         |                                      |
| <b>Technical-data:</b>          |                            |         |                                      |
| - Max. suitable cable diameter: | 50 mm                      |         |                                      |
| - Insulation removal length     | up to 2000 mm              |         |                                      |
| <b>Pneumatic:</b>               |                            |         |                                      |
| - Air pressure                  | 6 bar                      |         |                                      |
| -                               |                            |         |                                      |
| <b>Dimension:</b>               |                            |         |                                      |
| - Machine                       | P50/1000                   | P50/500 | P50/100                              |
| - length                        | 750 mm                     | 750 mm  | 750 mm                               |
| - width                         | 2600 mm                    | 1750 mm | 800 mm                               |
| - height                        | 400 mm                     | 400 mm  | 400 mm                               |
| - *                             | ---                        |         |                                      |
| - weight                        |                            |         |                                      |
| <b>Available Accessories:</b>   |                            |         |                                      |
| Blades for stripper             | 2mm                        | 2,5 mm  | ---- 45 mm 45,5 mm resolution 0,5 mm |
| Guide tubes                     | 2mm                        |         | ---- 50 mm resolution 1,0 mm         |
| Press block                     |                            |         |                                      |